



LINEARFLEX4.8

Architectural LED Linear Flexible Strip

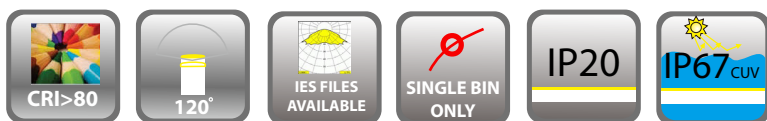


Power	4.8 watts per metre
Voltage	24VDC (23v min - 25v max)
Cutting Length	100mm - 6 LED's
Number/Type of LED's	60 per mtr / SMD3528 Constant Voltage
LED Pitch	16.66mm
Beam Angle	120°
Colour Temperature	2700k, 3000k, 4000k, 6000k, Red, Green, Blue, Yellow
Ra	CRI>80 - IES FILE AVAILABLE
Bin/Step	Single bin/3 MacAdam steps
Lifetime	30,000 hours
Operating Temp	Celsius -20°C ~ +45°C
Dimensions mm (LWH)	5,000 x 8 x 1.8 (IP20) / 5,000 x 10 x 5 (IP67C)
Mounting	Supplied with 3M adhesive to underside

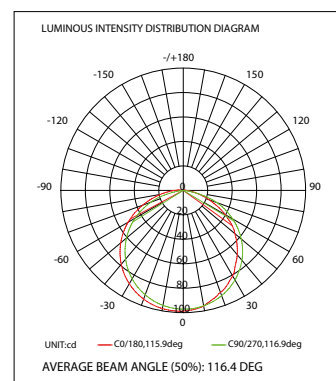


Lumen Output¹

IP20				IP20	
W27	2700k	354 Lm/Metre	Red	145 Lm/Metre	
W30	3000k	373 Lm/Metre	Green	245 Lm/Metre	
W40	4000k	384 Lm/Metre	Blue	125 Lm/Metre	
W60	6000k	373 Lm/Metre	Yellow	165 Lm/Metre	
IP67CUV				IP67CUV	
W27	2700k	330 Lm/Metre	Red	125 Lm/Metre	
W30	3000k	350 Lm/Metre	Green	220 Lm/Metre	
W40	4000k	360 Lm/Metre	Blue	105 Lm/Metre	
W60	6000k	350 Lm/Metre	Yellow	145 Lm/Metre	

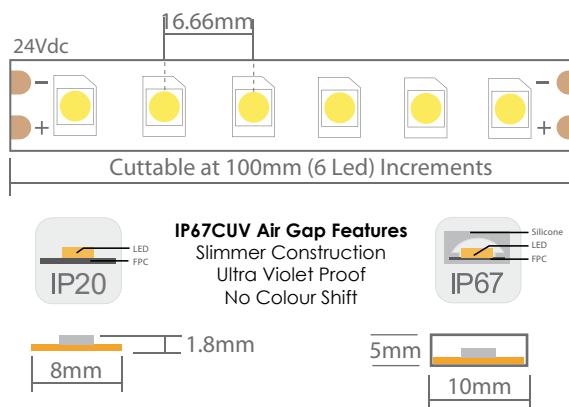

¹ - Data based on 1 metre of tape. Due to tolerances of the production process and the electrical components, values for light output and electrical power can decrease up to 15%

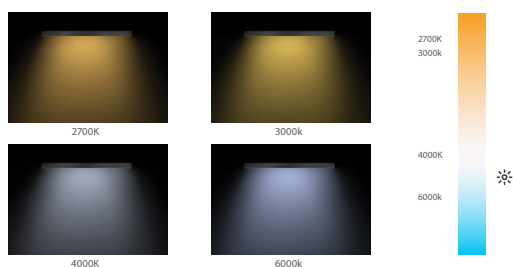

PRODUCT CODE BUILDER

LFIP **20** - 4.8- **W30** 80-24

IP Rating

IP20 - **20**
IP67CUV - **67**

LED Colour

2700K - **W27**
3000K - **W30**
4000K - **W40**
6000K - **W60**
RED/GREEN/BLUE/YELLOW - **R/G/B/Y**