


# LINEARFLEX 9.6CC

## Architectural LED Linear Flexible Strip



|                      |                                                       |
|----------------------|-------------------------------------------------------|
| Power                | 9.6 watts per metre                                   |
| Voltage              | 24VDC (23v min - 25v max)                             |
| Cutting Length       | 50mm - 6 LED's                                        |
| Number/Type of LED's | 120 per mtr / SMD2835 Constant Current                |
| LED Pitch            | 8.33mm                                                |
| Beam Angle           | 120°                                                  |
| Colour Temperature   | 2700k, 3000k, 4000k                                   |
| Ra                   | CRI>95 - IES FILE AVAILABLE                           |
| Bin/Step             | Single bin/3 MacAdam steps                            |
| Lifetime             | 30,000 hours                                          |
| Operating Temp       | Celsius -20°C ~ +45°C                                 |
| Dimensions mm (LWH)  | 5,000 x 12 x 1.5 (IP20) - (20,000 mm rolls available) |
| Mounting             | Supplied with 3M adhesive to underside                |

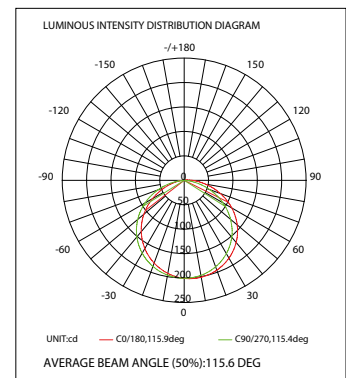


Maximum single run length  
using single feed  
Up to 20 Metres





### Lumen Output<sup>1</sup>

| IP20 |       |              |
|------|-------|--------------|
| W27  | 2700k | 622 Lm/Metre |
| W30  | 3000k | 683 Lm/Metre |
| W40  | 4000k | 759 Lm/Metre |

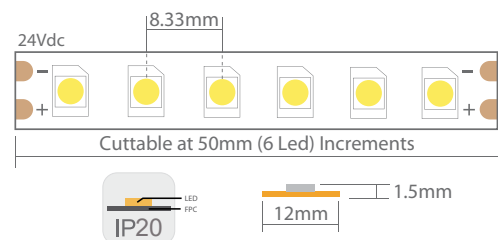

<sup>1</sup> - Data based on 1 metre of tape. Due to tolerances of the production process and the electrical components, values for light output and electrical power can decrease up to 15%

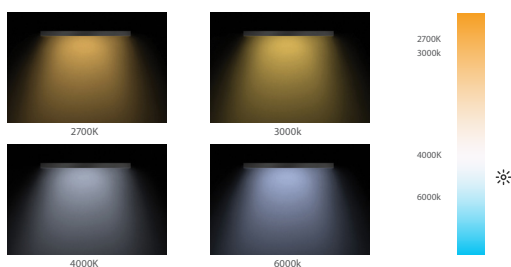

### PRODUCT CODE BUILDER

#### LFIP20 - 9.6CC - W27 95 - 24

LED Colour  
2700K - W27  
3000K - W30  
4000K - W40