


LINEARFLEX 10.1

Architectural LED Linear Flexible Strip




Power	10.1 watts per metre
Voltage	24VDC (23v min - 25v max)
Cutting Length	71mm - 7 LED's
Number/Type of LED's	98 per mtr / SMD2835 Constant Voltage
LED Pitch	10.2mm
Beam Angle	120°
Colour Temperature	2700k, 3000k and 4000k
Ra	CRI>80 - IES FILE AVAILABLE
Bin/Step	Single bin/3 MacAdam steps
Lifetime	30,000 hours
Operating Temp	Celsius -20°C ~ +45°C
Dimensions mm (LWH)	5,000 x 8 x 1.5 (IP20) 5,000 x 10 x 5 (IP67CUV)
Mounting	Supplied with 3M adhesive to underside

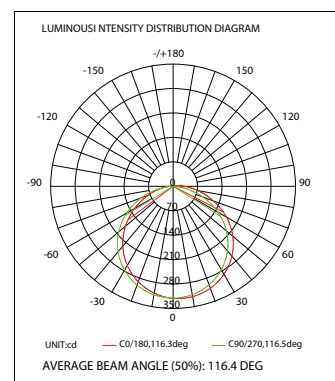



Lumen Output¹

IP20		
W27	2700k	1088 Lm/Metre
W30	3000k	1147 Lm/Metre
W40	4000k	1183 Lm/Metre

IP67CUV		
W27	2700k	1068 Lm/Metre
W30	3000k	1127 Lm/Metre
W40	4000k	1163 Lm/Metre

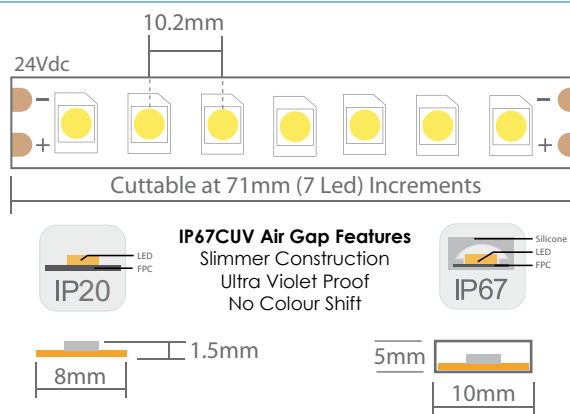

1 - Data based on 1 metre of tape. Due to tolerances of the production process and the electrical components, values for light output and electrical power can decrease up to 15%

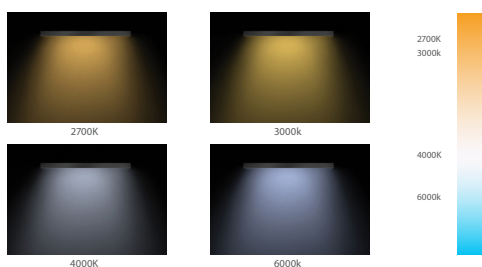

PRODUCT CODE BUILDER

LFIP20 - 10.1 - W30 80-24

IP Rating

IP20 - 20
IP67CUV - 67

LED Colour

2700K - W27
3000K - W30
4000K - W40
6000K - W60