


# LINEARFLEX 10

## Architectural LED Linear Flexible Strip




|                      |                                        |
|----------------------|----------------------------------------|
| Power                | 10 watts per metre                     |
| Voltage              | 24VDC (23v min - 25v max)              |
| Cutting Length       | 71mm - 7 LED's                         |
| Number/Type of LED's | 98 per mtr / SMD2835 Constant Voltage  |
| LED Pitch            | 10.2mm                                 |
| Beam Angle           | 120°                                   |
| Colour Temperature   | 2700k, 3000k and 4000k                 |
| Ra                   | CRI>90 - IES FILE AVAILABLE            |
| Bin/Step             | Single bin/3 MacAdam steps             |
| Lifetime             | 30,000 hours                           |
| Operating Temp       | Celsius -20°C ~ +45°C                  |
| Dimensions mm (LWH)  | 5,000 x 8 x 1.5                        |
| Mounting             | Supplied with 3M adhesive to underside |


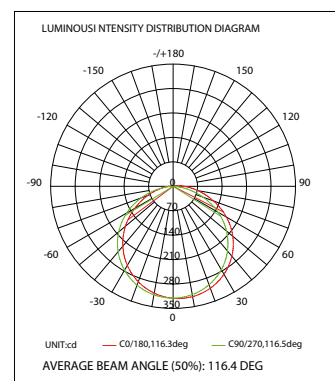


### Lumen Output <sup>1</sup>

| IP20 |       |               |
|------|-------|---------------|
| W27  | 2700k | 980 Lm/Metre  |
| W30  | 3000k | 1030 Lm/Metre |
| W40  | 4000k | 1080 Lm/Metre |

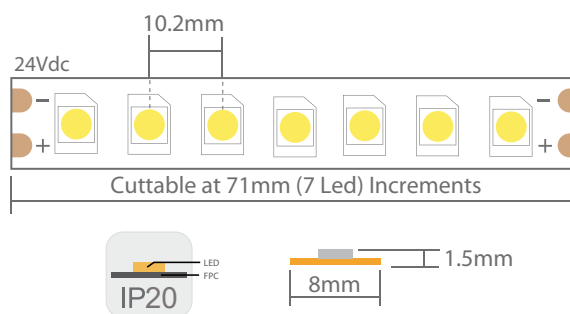

<sup>1</sup> - Data based on 1 metre of tape. Due to tolerances of the production process and the electrical components, values for light output and electrical power can decrease up to 15%

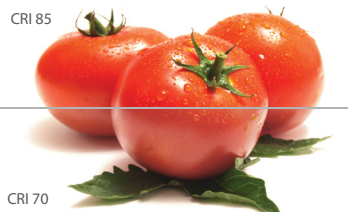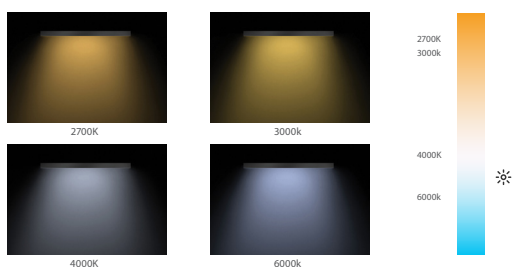

### PRODUCT CODE BUILDER

LFIP 20 - 10 - **W30** 90-24

#### LED Colour

2700K - **W27**  
3000K - **W30**  
4000K - **W40**